

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: nanoleaf

Supplier's address: Christian Yan, Nanoleaf Europe 11 Rue de Lourmel 75015 Paris France, FR

Model identifier: NL59

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	NA		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	Yes	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	Yes	Dimmable:	Yes

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	2	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	20 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2200...6500
On-mode power (P_{on}), expressed in W	2,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,10
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	0,10	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	83
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,320 0,340	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	11	Survival factor	1,00	
the lumen maintenance factor	0,90			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	9	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	1,8	Stroboscopic effect metric (SVM)	1,8	


(a) '-': not applicable;

(b) '-': not applicable;

Spectral Flux Graph

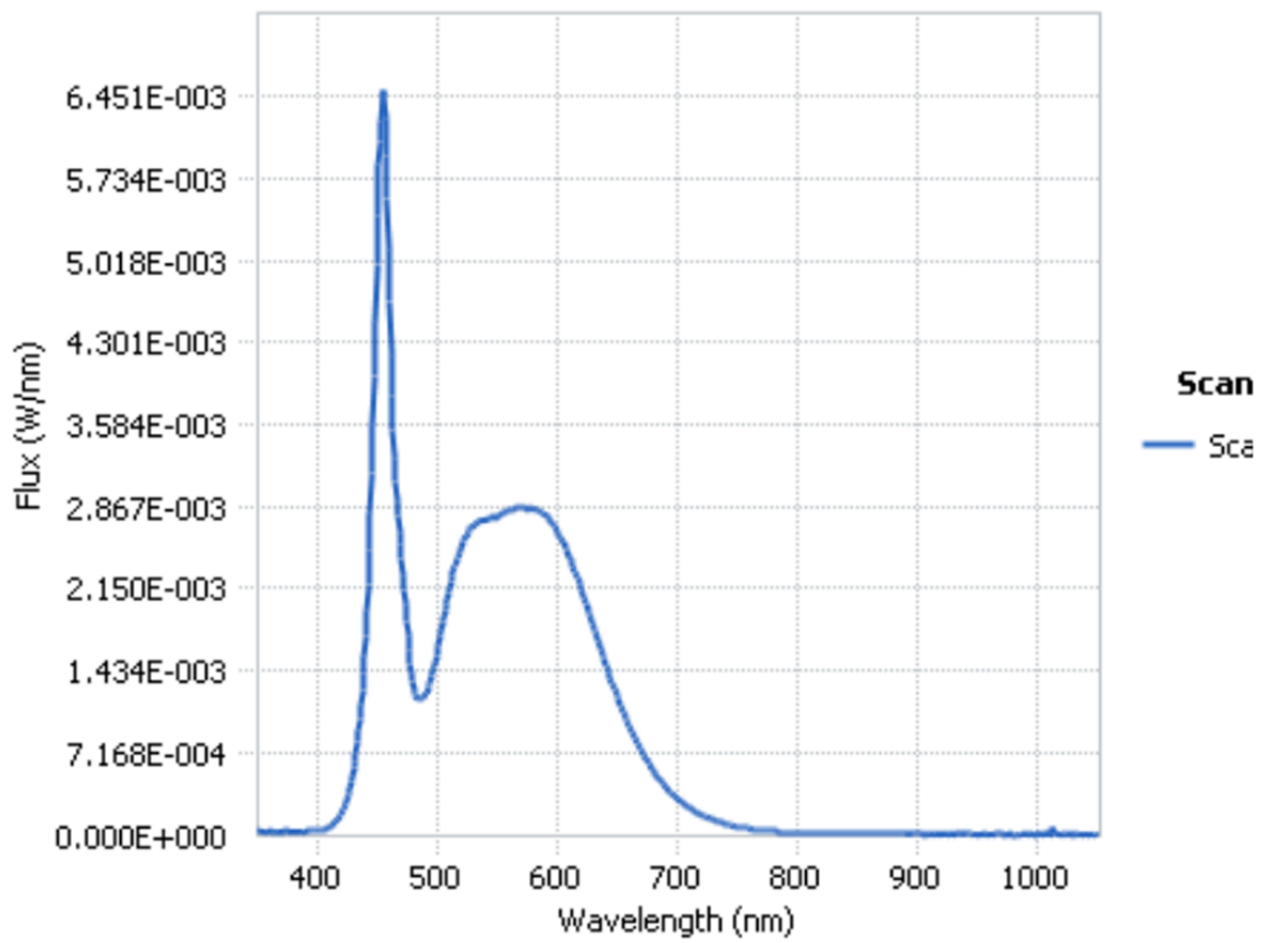

Model placed on the Union market from 13/10/2021



EPREL registration number: 1004315

<https://eprel.ec.europa.eu/qr/1004315>

Supplier: NANOLEAF EUROPE SAS (Manufacturer)

Website: www.nanoleaf.me

Customer care service:

Name: Christian Yan

Website: www.nanoleaf.me

Email: christian@nanoleaf.me

Phone: +852 9497 9800

Address:

Nanoleaf Europe 11 Rue de Lourmel 75015 Paris France
France